





FINISH: NATURAL OAK

MATERIALS: Solid oak edges with engineered oak veneer panels and black powdercoated metal







TAB273




entertainment unit

SHV030

TAB273

TAB273

4-shelf - tall

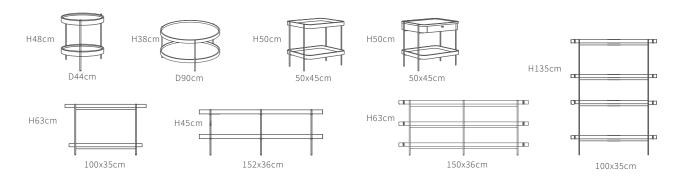

PRODUCT CARE

Wood is a porous material so avoid spills, particularly oils, red wine and pigment rich substances. Even condensation on the base of a glass can leave a ring mark that is difficult to remove. We recommend using placemats, coasters, trivets, tablecloths etc to help protect the surface. These also provide protection against scratches. Hot or cold objects can also affect the timber surface by interacting with the top layer of timber.

PREVENTATIVE CARE

Wipe spills immediately. Regular cleaning and dusting will help keep timber in its best condition. A damp cloth and mild soap can be used as required. Do not use bleach, acidic cleaners, or abrasive cleaning products. Application of Sure Seal Timber Sealer or similar can create a barrier to avoid stains penetrating the top layers of the timber. Follow instructions on pack carefully as incorrect application voids your warranty. Re-apply every 4-6 months.








FINISH: BLACK OAK

MATERIALS: Solid oak edges with engineered oak veneer panels and black powdercoated metal



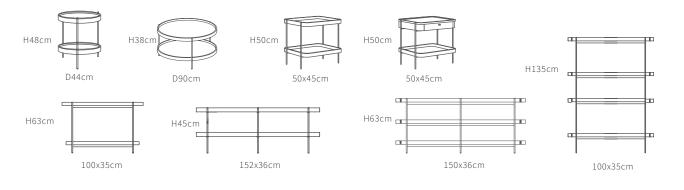

TAB325

PRODUCT CARE Wood is a porous material so avoid spills, particularly oils, red wine and pigment rich substances. Even condensation on the base of a glass can leave a ring mark that is difficult to remove. We recommend using placemats, coasters, trivets, tablecloths etc to help protect the surface. These also provide protection against scratches. Hot or cold objects can also affect the timber surface by interacting with the top layer of timber.

PREVENTATIVE CARE Wipe spills immediately. Regular cleaning and dusting will help keep timber in its best condition. A damp cloth and mild soap can be used as required. Do not use bleach, acidic cleaners, or abrasive cleaning products. Application of Sure Seal Timber Sealer or similar can create a barrier to avoid stains penetrating the top layers of the timber. Follow instructions on pack carefully as incorrect application voids your warranty. Re-apply every 4-6 months.

TAB329